

Wi-Fi Intelligent Circuit Breaker

Smart Life APP Operating Manual

1

Main Function



Download the app



Overvoltage protection



Locked for Maintenance



Undervoltage protection



Remote control



Overcurrent protection



Timer switch



Overload protection



Real-time monitoring of voltage, current, power

2

Main Technical Parameters

Communication Protocol: Wi-Fi(2.4 GHz)

Rated Operating Voltage: 90-300 V AC

Control Type: Remote/Manual

Poles: 1P+N (N Pole Pass-through)

Customizable Protocol: Bluetooth SIG Mesh/Zigbee

Model Selection: IB1-63B: Switching Type
 IB1-63M: Metering Type
 IB1-63MP: Metering & Protection Type

3

LED Indicator Description

The signal indicator flashes slowly, indicating that the product is in distribution network mode.

The indicator light displays a steady blue glow, indicating that the device has successfully connected to the network.

The signal indicator light turns off, indicating that the device is in offline mode.

The indicator light illuminates, indicating that the switch is in the closed position.

The indicator light on the button goes out, indicating that the switch is in the open position.

4

Live View

It can monitor the current, voltage, and power of the load equipment in real time and record power consumption data for different time periods—hourly, daily, monthly, and yearly. This helps users analyze the power consumption of the equipment more clearly. It also allows setting the switch status for different scenarios and enables remote real-time monitoring of the load electrical appliances.


total electricity consumption 5.00 kWh

5

Day Month Year

5.00 kWh

total electricity consumption




1:00 13:00 24:00

◀ 03/19 ▶

Real-time monitoring electricity consumption.

6

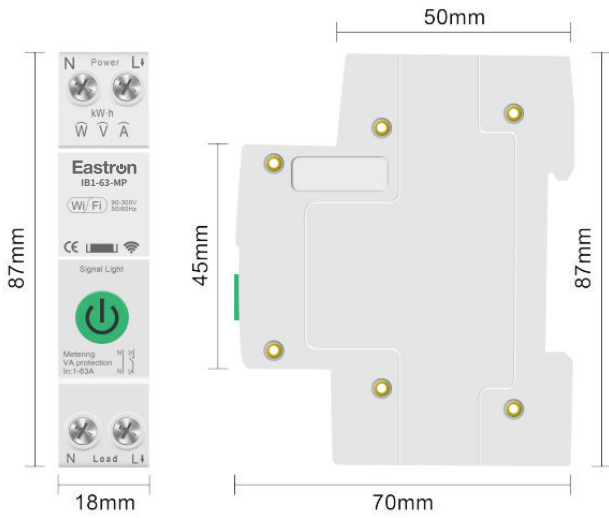

7

Network Configuration Steps

Step 1:

Connect the live wire to the L pole and the neutral wire to the N pole. Ensure the wiring is correct and the Wi-Fi signal is strong.




8

Network Configuration Steps

Step 2:

Turn on your phone's Bluetooth and Wi-Fi, launch the app, then press and hold the "Power" button for 5-10 seconds until the signal indicator flashes slowly.

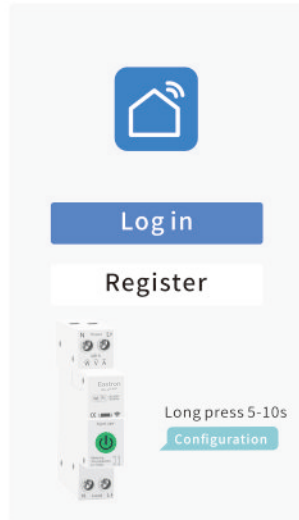

9

Network Configuration Steps

Step 3:

Click the "+" in the upper-right corner of the app, then select "Add Device," wait for the device to be discovered, and then click "Add."




10

Network Configuration Steps

Step 4:

Select Wi-Fi account Enter Wi-Fi password Tap "Next" Wait for device to connect

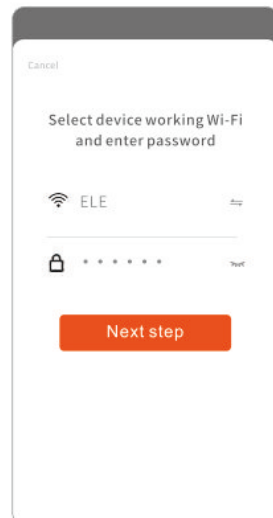


11

Network Configuration Steps

Step 5:


After successfully connecting to the network, the signal indicator light changes from slow flashing to steady illumination.

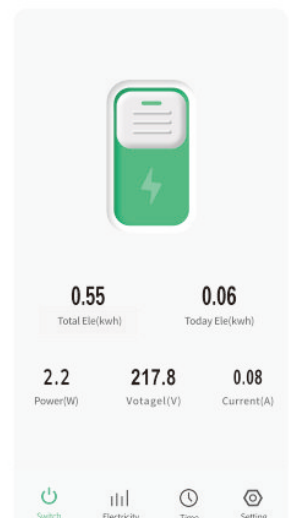


12

Equipment Sharing

Step 1:

Click the “” icon in the top-right corner of the main page and select "Share Device."

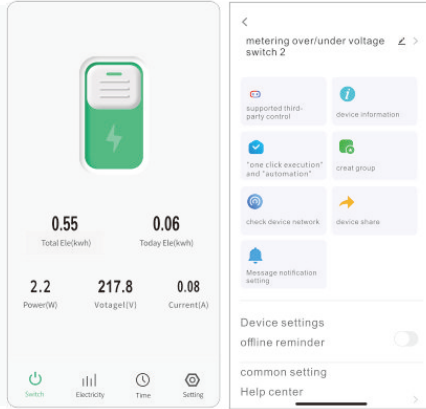


13

Equipment Sharing


Step 2:

Tap “Share with Smart Life Account” and enter the account you wish to share. or share with We Chat friends.

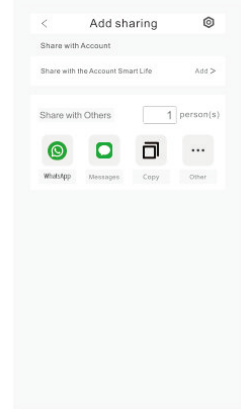

14

Overvoltage alarm(V)

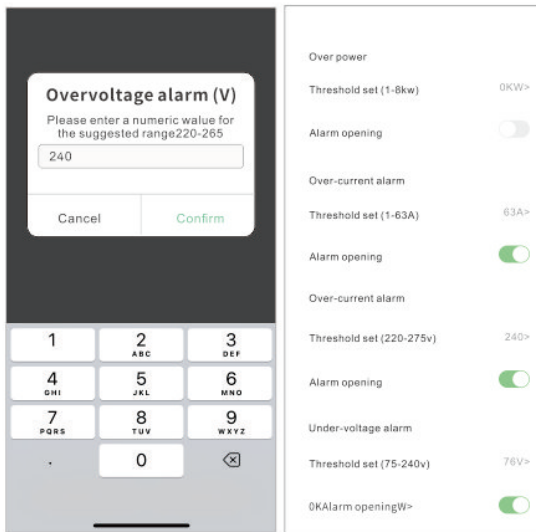

Eastron For more information, please contact us



Youtube



LinkedIn

Eastron Electronic Co., Ltd.
 Tel: 400- 996- 9296
 E- mail: sales@eastrongroup.com
 Web: www.eastrongroup.com
 Address: NO 52, Dongjin Road, Nanhu, Jiaxing, Zhejiang, China